

Kit Contents

| Description | Part No | Pcs |
|-----------------|----------|-----|
| Screw | 01050-04 | 2 |
| O-ring | 00338-59 | 2 |
| Top Cap | 60005-02 | 2 |
| O-ring | 00338-24 | 2 |
| Spring, Fr.fork | 68001-42 | 2 |
| Sticker Öhlins | 00192-01 | 2 |
| Sticker Öhlins | 01185-04 | 2 |

👁️Note!

Before installing this product, check the contents of the kit. If anything is missing, please contact an Öhlins dealer.

⚠️Warning!

Öhlins cannot be held responsible for any personal injury or damage that may occur after installing the Öhlins spring kit. We strongly recommend to let an Öhlins authorized service center install this kit.

⚠️Warning!

After you have installed this product, taken a test ride at low speed to make sure that your vehicle has maintained stability.

👁️Note!

Please note that this image is a general representation of the product and may differ slightly from your product.

👁️Note!

Please note that during storage and transportation, especially at high ambient temperature, some of the oil and grease used for assembling may leak and stain the packaging. This is in no way detrimental to the product, wipe off the excessive oil/grease with a cloth.

Fork Damping Kit for Kawasaki KLX250F

FFKA110003

Mounting Instructions

MOUNTING INSTRUCTIONS

Congratulations!

With this purchase you have made a clear statement. This high performance Front Fork kit from Öhlins is nothing but pure racing breed which means that you have taken one more step to eliminate luck on your motorcycle.


The balance between your Front Fork and rear suspension will sharpen up and the performance of your Front Fork will improve. Almost 40 years of racing experience is now a crucial part of your riding experience.

Recommended oil

We recommended to use Öhlins high performance Front Fork fluid 01316-01.

Recommended oil Level

560ml in each Fork Leg.

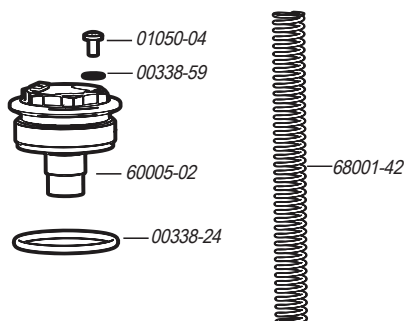

How to install

- 1.Put the motorcycle on the work stand so that front wheel barely touch the ground. Make sure the motorcycle is in a stable.
- 2.Loosen the screws of the triple clamp top mounting.
- 3.Loosen (do not remove) both fork top cap 1/2 turn.
- 4.Remove both fork legs as per vehicle service manual instruction.
- 5.Remove the original Top cap and spring.
- 6.Purge all the oil from both Fork Legs.
- 7.Install the Öhlins spring and fill the Öhlins oil in both Fork Legs.
- 8.Install the Öhlins top cap at hand tighten torque.
- 9.Re-install both fork legs as per vehicle service manual instructions.

Relief screw

After using your motorcycle for a certain amount of time, please remove the screw situated on the top cap in order to release the air accumulated inside the Front Fork. Screw No.01050-04 Tightening torque is 3 Nm.

👁️ Öhlins products are subject to continuous improvement and development, therefore, although these instructions include the most up-to-date information available at the time of printing, minor updates may occur.

To find the latest information contact an Öhlins distributor. Please contact Öhlins if you have any questions regarding the contents in this document.

Part no. MI_FFKA 110003_EN_1
Issued 2015-01-07



© Öhlins Asia Co. Ltd. All rights reserved. Any reprinting or unauthorized use without the written permission of Öhlins Racing AB is prohibited.

Öhlins Asia Co. Ltd
700/937 Moo5, Tambol Nongkhaka,
Amphur Phantong, Chonburi Province
20160 Thailand



www.ohlins.com

MOUNTING INSTRUCTIONS

Congratulations!

With this purchase you have made a clear statement. This high performance Front Fork kit from Öhlins is nothing but pure racing breed which means that you have taken one more step to eliminate luck on your motorcycle.


The balance between your Front Fork and rear suspension will sharpen up and the performance of your Front Fork will improve. Almost 40 years of racing experience is now a crucial part of your riding experience.

Recommended oil

We recommended to use Öhlins high performance Front Fork fluid 01316-01.

Recommended oil Level

560ml in each Fork Leg.

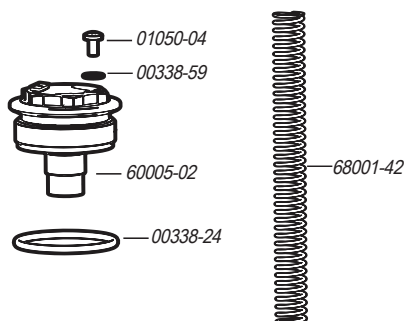

How to install

- 1.Put the motorcycle on the work stand so that front wheel barely touch the ground. Make sure the motorcycle is in a stable.
- 2.Loosen the screws of the triple clamp top mounting.
- 3.Loosen (do not remove) both fork top cap 1/2 turn.
- 4.Remove both fork legs as per vehicle service manual instruction.
- 5.Remove the original Top cap and spring.
- 6.Purge all the oil from both Fork Legs.
- 7.Install the Öhlins spring and fill the Öhlins oil in both Fork Legs.
- 8.Install the Öhlins top cap at hand tighten torque.
- 9.Re-install both fork legs as per vehicle service manual instructions.

Relief screw

After using your motorcycle for a certain amount of time, please remove the screw situated on the top cap in order to release the air accumulated inside the Front Fork. Screw No.01050-04 Tightening torque is 3 Nm.

👁️ Öhlins products are subject to continuous improvement and development, therefore, although these instructions include the most up-to-date information available at the time of printing, minor updates may occur.

To find the latest information contact an Öhlins distributor. Please contact Öhlins if you have any questions regarding the contents in this document.

Part no. MI_FFKA 110003_EN_1
Issued 2015-01-07




© Öhlins Asia Co. Ltd. All rights reserved. Any reprinting or unauthorized use without the written permission of Öhlins Racing AB is prohibited.

Öhlins Asia Co. Ltd
700/937 Moo5, Tambol Nongkhaka,
Amphur Phantong, Chonburi Province
20160 Thailand



www.ohlins.com

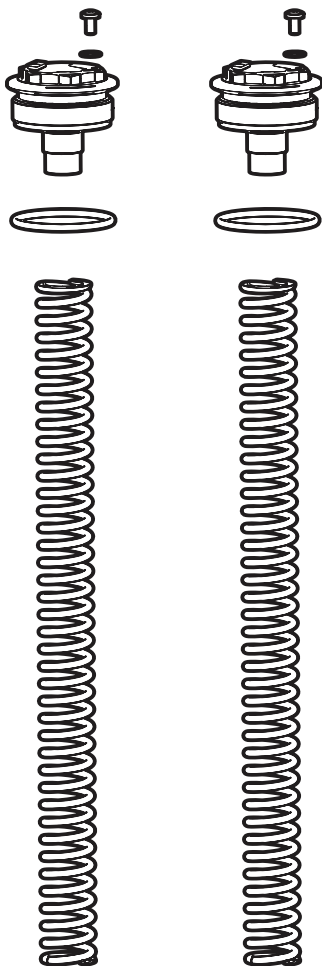

Kit Contents

| Description | Part No | Pcs |
|-----------------|----------|-----|
| Screw | 01050-04 | 2 |
| O-ring | 00338-59 | 2 |
| Top Cap | 60005-02 | 2 |
| O-ring | 00338-24 | 2 |
| Spring, Fr.fork | 68001-42 | 2 |
| Sticker Öhlins | 00192-01 | 2 |
| Sticker Öhlins | 01185-04 | 2 |

👁️Note!

Before installing this product, check the contents of the kit. If anything is missing, please contact an Öhlins dealer.

⚠️Warning!

Öhlins cannot be held responsible for any personal injury or damage that may occur after installing the Öhlins spring kit. We strongly recommend to let an Öhlins authorized service center install this kit.

⚠️Warning!

After you have installed this product, taken a test ride at low speed to make sure that your vehicle has maintained stability.

👁️Note!

Please note that this image is a general representation of the product and may differ slightly from your product.

👁️Note!

Please note that during storage and transportation, especially at high ambient temperature, some of the oil and grease used for assembling may leak and stain the packaging. This is in no way detrimental to the product, wipe off the excessive oil/grease with a cloth.

Fork Damping Kit for Kawasaki KLX250F

FFKA110003

Mounting Instructions